

Date/Revised: 12.01.2024

Version No.: 1.0






THERMAL DATA	CONDITIONS	TEST METHOD	TYPICAL VALUE
Melting Point		ISO 11357	343 °C
Glass Transition	Onset	ISO 11357	143 °C
Thermal Conductivity	Along flow, 23°	ISO 22007-4	0.32 W m-1 K-1

Mechanical Properties*	CONDITIONS	TEST METHOD	TYPICAL VALUE
Tensile Strength	Yield, 23 °C	ISO 527	105 MPa
Tensile Elongation	Break, 23 °C	ISO 527	30%
Tensile Modulus	23 °C	ISO 527	4.1 GPa
Flexural Strength	At 3,5% strain, 23 °	ISO 178	130 MPa
Flexural Modulus	23 °C	ISO 178	3.9 GPa
Charpy Impact Strength	Notched, 23 °C	ISO 179/1eA	4.2 kJ m-2
Izod Impact Strength	Notched, 23 °C	ISO 180/A	5.0 kJ m-2

*Mechanical properties refer to the amorphous phase of the material

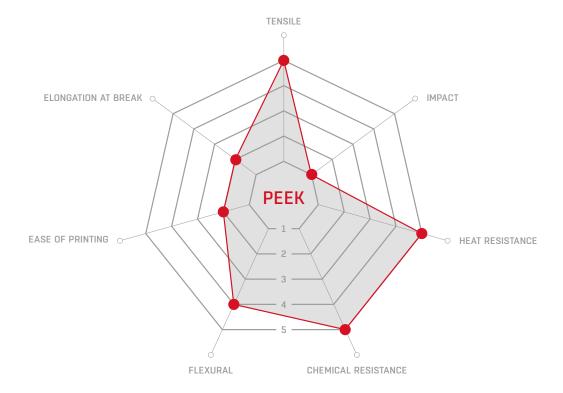

General information

PEEK is a high-performance polymer of a PAEK family that offers a unique combination of properties. 3D printed PEEK models combine resistance to various chemicals, wear, and fatigue resistance, exceptionally

high-temperature resistance as well as very good mechanical properties. PEEK mechanical properties are one of the highest of all known thermoplastic materials. PEKK and PEEK are extremely resistant to external conditions.

PEEK is flame resistant (Class V-0 according to UL 94) with low smoke and toxicity. It provides high resistance for a wide range of chemicals, also in increased service temperatures.

PEEK can also be used as an effective electric insulator in a wide range of frequencies with outstanding thermal and environmental resistance.

Usually, the desirable state of PEEK is the semi-crystalline, which can be achieved after the annealing process of the printed model. In order to reach high dimensional accuracy of the models and the quality of

the expected prints, PEEK needs high extrusion temperature, heated bed, and the actively heated print chamber.

Detailed data are available on our website www.3dgence.com

AMERICAS

3DGence America Inc. Dallas, Texas, USA

+1.855.466.3813 inquiries@3dgence.com

EUROPE

3DGence GmbH. Gradignanstraße 4 64319 Pfungstadt, Germany

+49 6157 9118972 cs@3dgence.com 3DGence sp. z o.o. Graniczna 66 44-178 Przyszowice, Poland

+48 32 438 98 63 cs@3dgence.com